

ADJUSTABLE REAR RACK




PLEASE READ ALL INSTRUCTIONS BEFORE
INSTALLING YOUR NEW CARGO RACK

WARNING!



FAILURE TO INSTALL ACCESSORIES
PROPERLY MAY RESULT IN SERIOUS
INJURY, DEATH OR WORSE, DAMAGE
TO YOUR BICYCLE!

PURE CYCLES
THE BEST BIKES
IN THE BIZ

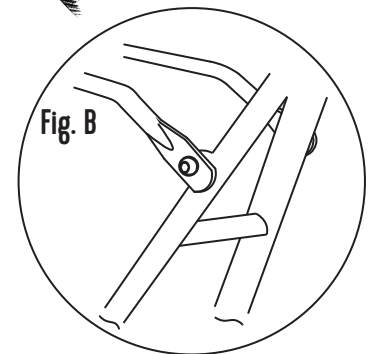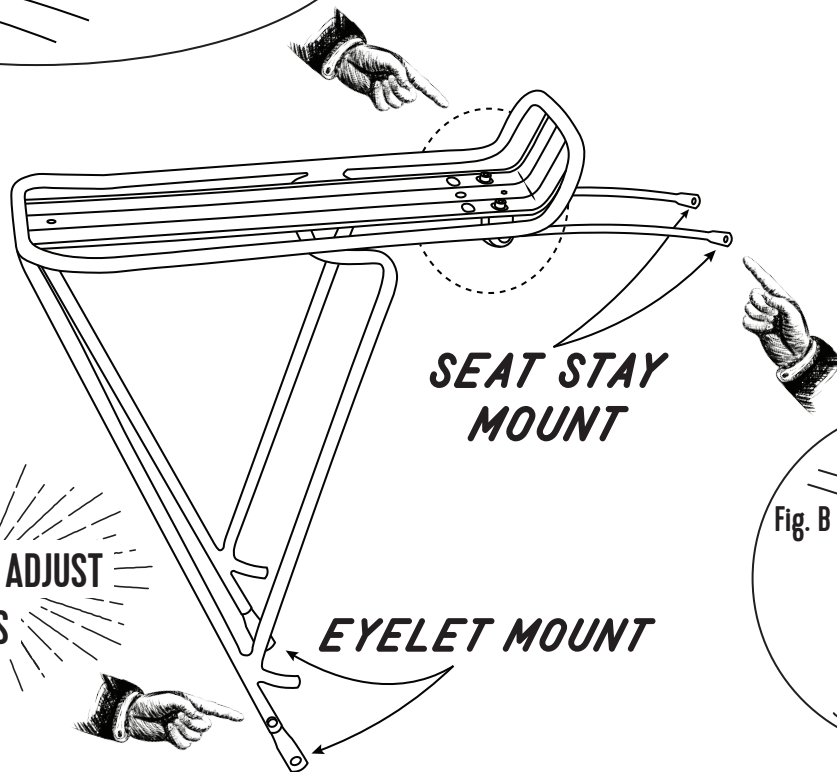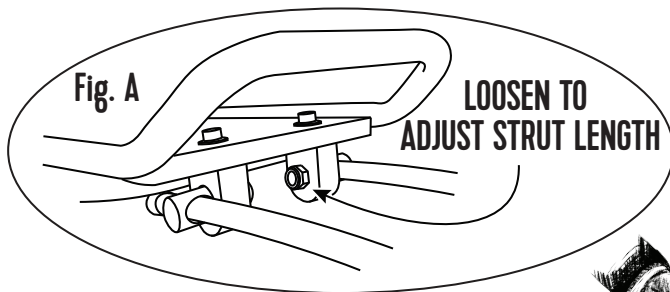

PC-RA010

INSTRUCTIONS

PLACE RACK OVER REAR WHEEL AND ALIGN, THEN CONNECT TO REAR DROPOUT EYELETS
VIA INCLUDED HARDWARE. IF NECESSARY, LOWER STRUTS CAN BE ADJUSTED BY LOOSENING THE INDICATED BOLT.

ATTACH THE FORWARD FACING UPPER STRUTS TO THE SEAT STAY EYELETS [Fig. B] OR P CLAMP (NOT INCLUDED),
MAKING SURE THE TOP OF THE RACK IS LEVEL WITH THE GROUND, THEN TIGHTEN CLAMP BOLTS [Fig. A].

DOUBLE CHECK TIRE CLEARANCE ON ALL SIDES AND ADJUST AS NECESSARY FOR SAFETY.

DOUBLE CHECK ALL BOLTS AND CONNECTIONS ARE TIGHT AND NO PLAY IS DETECTED.

