

Rascal Platform Pedal


Instruction Manual

PP001

Please read all instructions before installing your new pedals.

Warning

Failure to install pedals properly may result in damage to your bicycle, serious injury, and/or death.

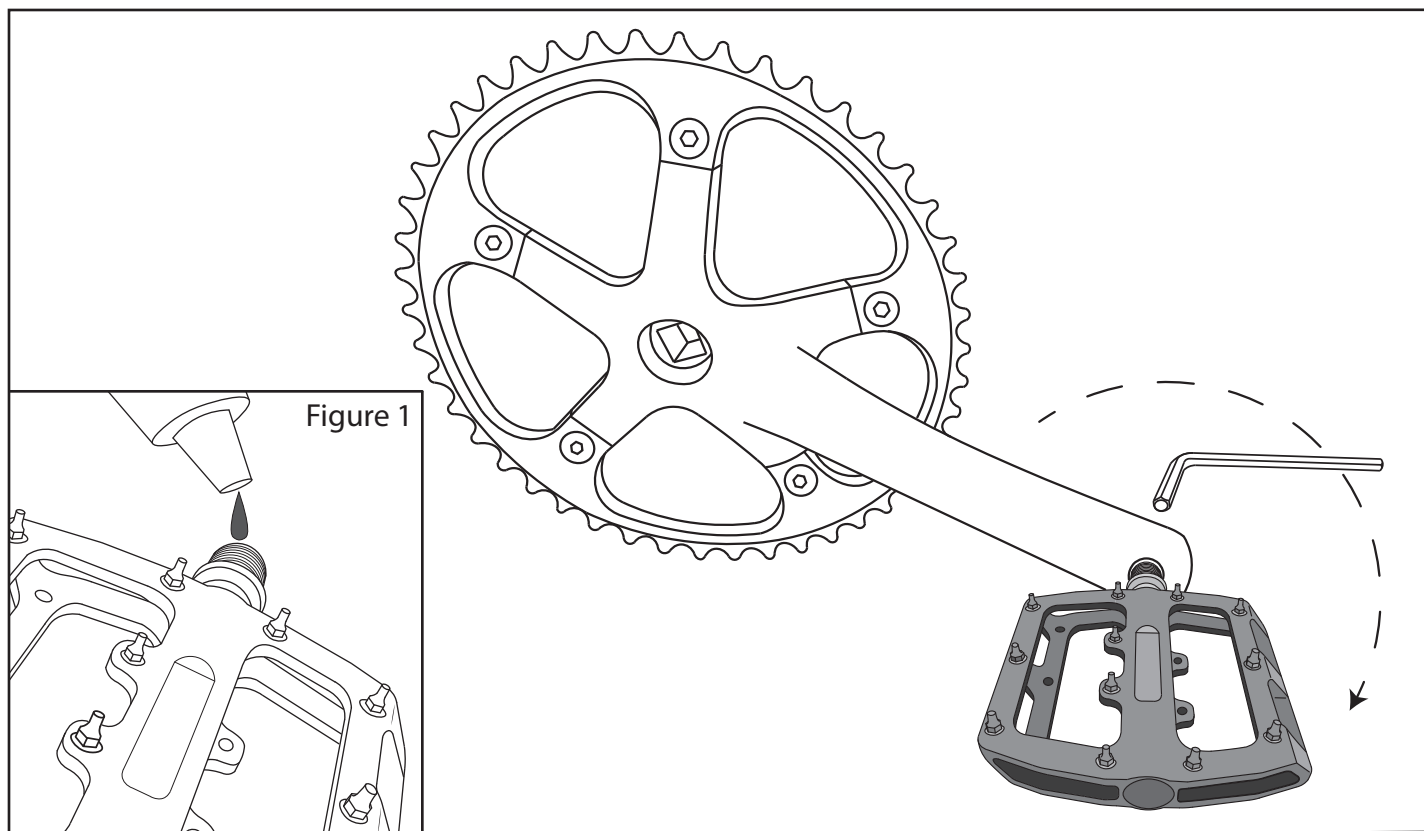

Please Note:

Pedals have both left and right hand threads. Forcing pedals to thread on to the wrong side can damage the crankarm and/or pedal threads. Both left and right side pedals tighten by turning toward the front of the bike.

The LEFT pedal can be identified by a groove in the axle near the threads.

Installation

1. Remove old pedals and apply grease to the threads of the pedals to be installed. **Figure 1**
2. Hand thread the first pedal in to the crankarm until the threads engage.
3. Finish tightening using a 5mm allen wrench (not included) to a minimum of 35Nm.
4. Repeat this process for the other side.
5. Double check that both pedals are fully tightened and secure with no play.